



PENDERM ENTERPRISES LIMITED

GESA FLATS OFF NORTH AIRPORT ROAD,

GROUND FLOOR EMBAKASI.

P.O.BOX 63031-00200 NAIROBI, KENYA.

TELL.0715779902/0727815651,

EMAIL.: Info@pendermenterprisesltd.co.ke

PENDERM ENTERPRISES LIMITED

International socket with USB and Switch

Electric Avatar On series products. To ensure

For the proper application of our product, please read through the following information before installation and use.

This application guide applies to the following products.

(Notes: suffix WE/WG/GH/LW/WD/ST_C5/G2 etc. mean the colors and sales areas)

Cat. No.	Description
E8315TSU	10A 250VAC 1 Gang international socket with USB and switch
	SPECIFICATIONS
USB-rated input	:220-250V~, 50/60Hz, 0.45A
USB Output	5V 2.1A Max
USB Protection	: Overheat, output over current, output over voltage, output short circuit
Socket rated voltage	250V-
Socket rated current	:10A
Mounting centre	:60.3mm
Operation Temperature	:0-40°C

IMPORTANT NOTE

1. The products must be installed by qualified electricians.
2. Please check your local wiring regulations before installation.
3. This permanently connected equipment does not contain an internal disconnected device; a readily accessible disconnected device should be provided externally.
4. This product can only be applied at altitudes below 2000 m.
5. Please install with a British Standard wall box of 47mm depth to aid correct operation of the product. The product should be mounted on concrete or other non-combustible surfaces only.
6. Please shield/mask the product before renovation to avoid contamination and degradation.
7. Please keep the front cover safe in order to prevent damage before and during installation.
8. If the product is not firmly fixed, it may cause an electric shock.
9. Turn off the power supply when cleaning the product. Use a soft and dry cloth to wipe off the dirt and contamination on the surface. Do NOT use corrosive chemicals.
10. Before charging the product, please ensure the battery of your device complies with the Battery Charging Specification. Do not use multi-adaptors. Reserve charging is not allowed.

GESA FLATS OFF NORTH AIRPORT ROAD,
GROUND FLOOR EMBAKASI.
P.O.BOX 63031-00200 NAIROBI, KENYA
TELL.0715779902/0727815651,
EMAIL. Info@pendermenterprisesltd.co.ke

11. The charging time depends on the supported charging protocol, power, battery capacity, charging line quality, and other factors decided by the charged device itself

12. Do not insert foreign objects (e.g., small metal wires, paper clips, liquids, etc.) into the USB charger

13. User will feel some heat at the product surface when charging is in progress 14.Indoor use only

WIRING DIAGRAMS




MOUNTING INSTRUCTION

1. Connect the wires to the terminals (recommend to leave 10-12mm bare metal wire) and tighten the terminal screws.

2. Screw the product module onto the wall box.

3. Snap the surround.

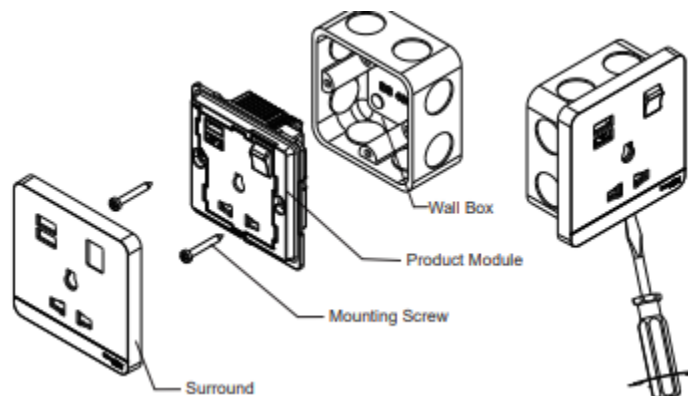

Insert a screwdriver into the clip lock, and twist the screwdriver to remove the surround.